




Philips
Magic 5 Primo
Plain paper fax
+ telephone and copier

Primo



PPF 631

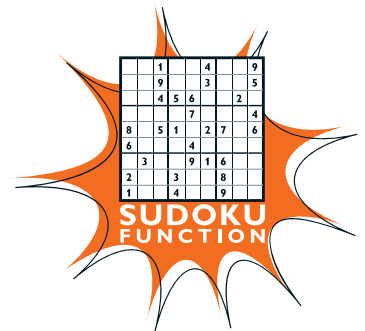

fax it, say it

with Philips Magic 5 Primo

The Magic 5 series offers you the usual reliability of Philips plain paper faxes. Moreover it comes in a new and innovative design and is smaller than ever. Distinctive ringtones, predefined fax forms and outgoing call log are only a few of this machine's various features that will make your life easier and more comfortable.

Reliable plain paper fax

Stores up to 15 pages

Feature-rich telephone

Allows distinctive ringtones

Easy to use copier

With fine-/photo resolution

PHILIPS

Product Specifications

Main features

Ink-film fax

- ITU Group 3 compatible (T.30 standard/T.30 new)
- 9.600 bps modem speed, auto fall back
- Horizontal resolution: 8 pixels/mm
vertical resolution standard: 3.85 lines/mm
vertical resolution fine: 7.7 lines/mm
- Page header, automatic redial
- Sending report with reduced copy of the first page
- Printing method: thermal transfer
- 10 page automatic document feeder (ADF)
- Predefined fax forms
- Sudoku printing with solutions (easy - medium - tough - devil)
- Timer function (send later)
- Up to 15 page memory
- Group broadcasting
- Easy polling (receive and send)
- Paper tray up to 50 sheets
- Cordless phone management

Telephone

- 50 name dial entries
- 10 ringer melodies
- Caller identification (CLIP)*
- Distinctive ring tones**
- 10 short dial keys
- On hook dialling
- Chain dialling
- Redial of the last 10 numbers
- Outgoing call log print

Copier

- Multicopy up to 15 pages
- Fine-/photo-resolution
- Zoom-function (enlarge/reduce)
- 16 grey scales

* Depends on the availability of the service on the local operators network

** Depends on the availability of caller identification

General information

Power consumption

- | | |
|--------------------------|------------|
| · Stand by | typ. 1,5 W |
| · Transmission | typ. 15W |
| · Reception | typ. 15W |
| · Copy | typ. 15W |
| · Telephone conversation | typ. 4W |

Display

- Liquid crystal-display (LCD), 16 characters/
1 line, European characters

Installation

- Easy-install menu and help pages

Dimension (WxDxH)

- | | |
|------------|---------------|
| · Unpacked | 313x197x129mm |
| · Packed | 377x247x200mm |

Weight

- | | |
|----------------------------------|-------|
| · Unpacked (without accessories) | 2,4kg |
| · Packed (incl. country kit) | 3,3kg |

Temperature range

- | | |
|--------------------|----------------|
| · Operation | 5° C - 40° C |
| · Storage packed | -25° C - 50° C |
| · Storage unpacked | 0° C - 45° C |

Relative humidity

- | | |
|--------------------|-----------|
| · Operation | 15 - 85 % |
| · Storage packed | 5 - 95 % |
| · Storage unpacked | 15 - 85 % |

Standard package includes

- Fax machine incl. cables (mains and telephone network)
- Starter ink film
- User-manual including installation-guide

Accessories

- Philips PFA 351 with PLUG'N'PRINT Card/up to 140 pages A4

9 NC	288090XXX
Type number	PPF 631/XXB
EAN code	342516017XXXX
Designed for	PSTN/PABX
Power supply	195 - 264V AC/ 47 - 63Hz

